


DOWNLIGHTS (HALERS RANGE)

TECHNICAL SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

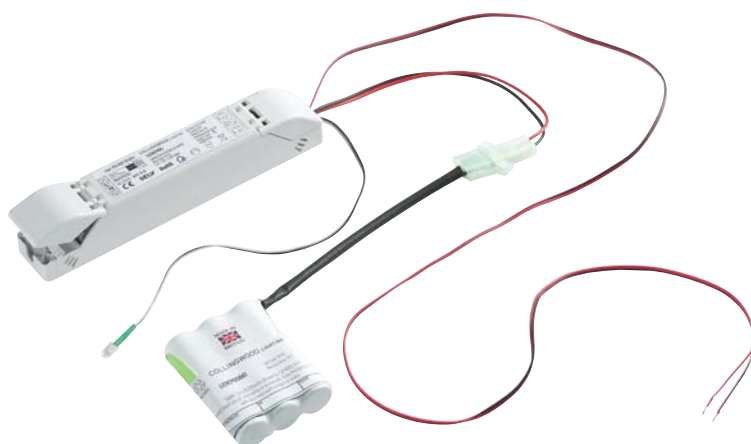

LEDEP05

3HR MAINTAINED THROUGH HOLE EMERGENCY PACK



Features & Benefits

Emergency mode powers H2 / H4 / H4 FF / H4 EYEBALL / H5 500 & H6ND / H6DIM at 175mA. Approx 25% light output compared to normal running

Can be used with other light fittings using 1-3 high power LEDs at 700mA

Provides minimum of 3 hours of emergency lighting

Green indicator light indicates charging of batteries

PRODUCT DATA

Product Code	LEDEP05
	LEDEP05BAT

ELECTRICAL CHARACTERISTICS

Rated wattage	INPUT		OUTPUT		Power factor
	Current	Voltage	Current	Voltage	
N/A	0.07A	220V-240V 50-60Hz	175A	6-12V	55%

GENERAL

Ambient temp (ta = °C)	50
Case temp (tc = °C)	70
Control	N/A
Double insulation	Yes
Efficiency	N/A
Inrush current	5A 0.3µs
IP rating	20
Loop in / Loop out	N/A
Protection	Mains surge, short circuit, over-load & over heating (delete as appropriate)
SELV (safety extra low voltage)	Yes
Weight (kg)	0.1

WIRING

Connection output	Flying lead
Input cable required	0.5 - 1.5mm ²
Output cable required	0.240mm ² (supplied)

WARRANTY

1 year

Dimensions

