


Item Image



Wiring

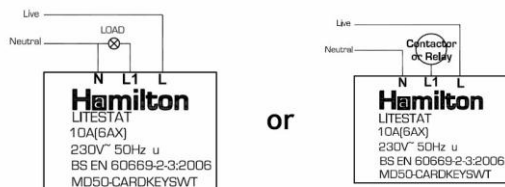

## LSX C11 AB-SB B

Linea-Scala CFX Antique Brass/Satin Brass 1 gang On/Off 10A (6AX) Card Switch with Blue LED Locator. Standard Insert will be Antique Brass with a Black surround.

Primary Range	Linea-Scala CFX
Insert Type	Card Operated Switches
Plate Finish	Satin Brass
Frame Finish	Antique Brass
Switch Colour	Antique Brass
Body & Switch Trim	Black
Height	Single = 91.4mm
Width	Single = 91.4mm
Depth	Single = 4.2mm
Fixing Hole Centres	Box Fixing = 60.3mm Box Fixing = 60.3mm
Minimum Wall Box Depth	35mm
Wattage	
Switched Poles	Single
Current Rating	10A (6AX)
Voltage	220/250V AC
Max load	10 Amp (6 Amp inductive)
Contact Gap Minimum	3mm
Terminal Capacity 1	3 x 1mm <sup>2</sup>
Terminal Capacity 2	2 x 1.5mm <sup>2</sup>
Terminal Capacity 3	1 x 2.5mm <sup>2</sup>
Terminal Capacity 4	
Terminal Capacity 5	
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40° C
Recommended Location	Indoor use only
Standard/Approval	BS EN 60669-2:3
Patents and Trademarks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Scala CFX R21 is a UK Registered Design Certificate No. 2036047 Linea-Scala CFX SS2 is a UK Registered Design Certificate No. 2036048

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.

It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

Correct as at August 2012  
E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK  
T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com  
www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary)  
Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire  
Registered in London No. 941624 • VAT Registration No. 222 6607 84

