

Order Code :

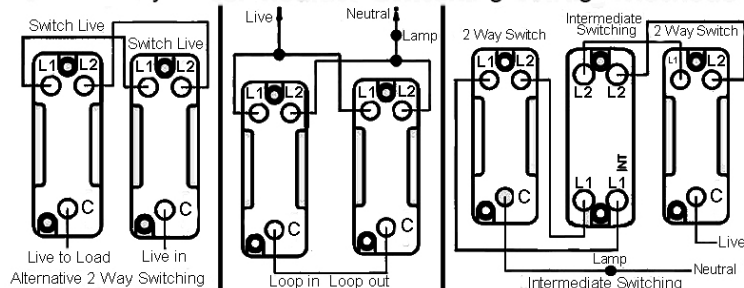
LSX R232 BK-BK B





Linea-Scala CFX Black Nickel/Black Nickel 3 gang 2 Way 20AX Rocker. Standard Insert will be Black Nickel with a Black surround.

Attributes

Primary Range	Linea-Scala CFX
Insrt	R232
Plate material	Metal (2 part)
Size (double) height	91.4mm
Size (double) width	150.4mm
Size (double) depth	4.2mm
Box fixing hole centres	120.6mm
Grid fixing hole centres	Grid fixing inserts are available on Linea-Scala CFX plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue
Minimum wall box depth	35mm
Current rating	20AX
Voltage	220/250V AC
Max load	20 Amp inductive
IP rating	IP2XD
Switched Poles	Single
Contact Gap Minimum	3mm
Terminal Capacity 1	5 x 1mm ²
Terminal Capacity 2	4 x 1.5mm ²
Terminal Capacity 3	2 x 2.5mm ²
Terminal Capacity 4	2 x 4mm ² Multi-Strand
Terminal Capacity 5	1 x 6mm ²
Earth Terminal Capacity 1	6 x 1mm ²
Earth Terminal Capacity 2	5 x 1.5mm ²
Earth Terminal Capacity 3	3 x 2.5mm ²
Earth Terminal Capacity 4	2 x 4mm ² Multi-Strand
Earth Terminal Capacity 5	1 x 6mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5Å° to +40Å°C
Recommended Location	Indoor use only
Max installation Altitude	2000m
BS EN ISO Standard	BS EN 60669-1
Patents And Trademarks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Scala CFX R21 is a UK Registered Design Certificate No. 2036047 Linea-Scala CFX SS2 is a UK Registered Design Certificate No. 2036048

2 Way and Intermediate Switching Wiring Methods



All products listed conform to current British or European standards and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.	It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	   

R. Hamilton & Co Ltd.

Unit G

Quarry Industrial Estate

MERE, Wiltshire

UK BA12 6LA

Tel: +44 (0)1747 860088

Fax: +44 (0)1747 861032

Email: info@hamilton-litestat.com

Web: www.hamilton-litestat.com